





直线模组产品系列

型号 Model		MSY94		MSY150		MSY200													
规格 Specification		单位 Unit		MSY94		安装方式 Installation Way		导程 Lead		负载 Load		A		B		C			
MSY94-MF				MSY94-M (L/R/U/D)		水平安装 Horizontal Use				5		30		500		50		25	
						Horizontal Use				10		10		500		160		100	
												20		500		140		120	
												5		500		270		200	
						墙面安装 Wall Installation Use				5		30		50		25		500	
										10		10		160		100		500	
												20		140		120		500	
												5		270		200		500	
						垂直安装 Vertical use				5		30		25				25	
										10		10		160				100	
												20		140				140	
												5		270				200	
输出功率 Rated Output		W		200/400W, 3000min ⁻¹		垂直安装 Vertical use				单位		Mta _{max}		Mx _{max}		My _{max}		Mp _{max}	
最大速度 Max. Speed		mm/s		250 (500)		Estimated Condition				Nm		2.1		68		32		32	
最大负载 Max. Load		kg		H: 10 (5) V: 8 (4)															
				H: 30 (20) V: 15 (8)															
有效行程 Stroke Range		mm		100~600															
定位精度 Repeatability		mm		±0.02															
驱动方式 Drive Type				丝杠 BALL SCREW															

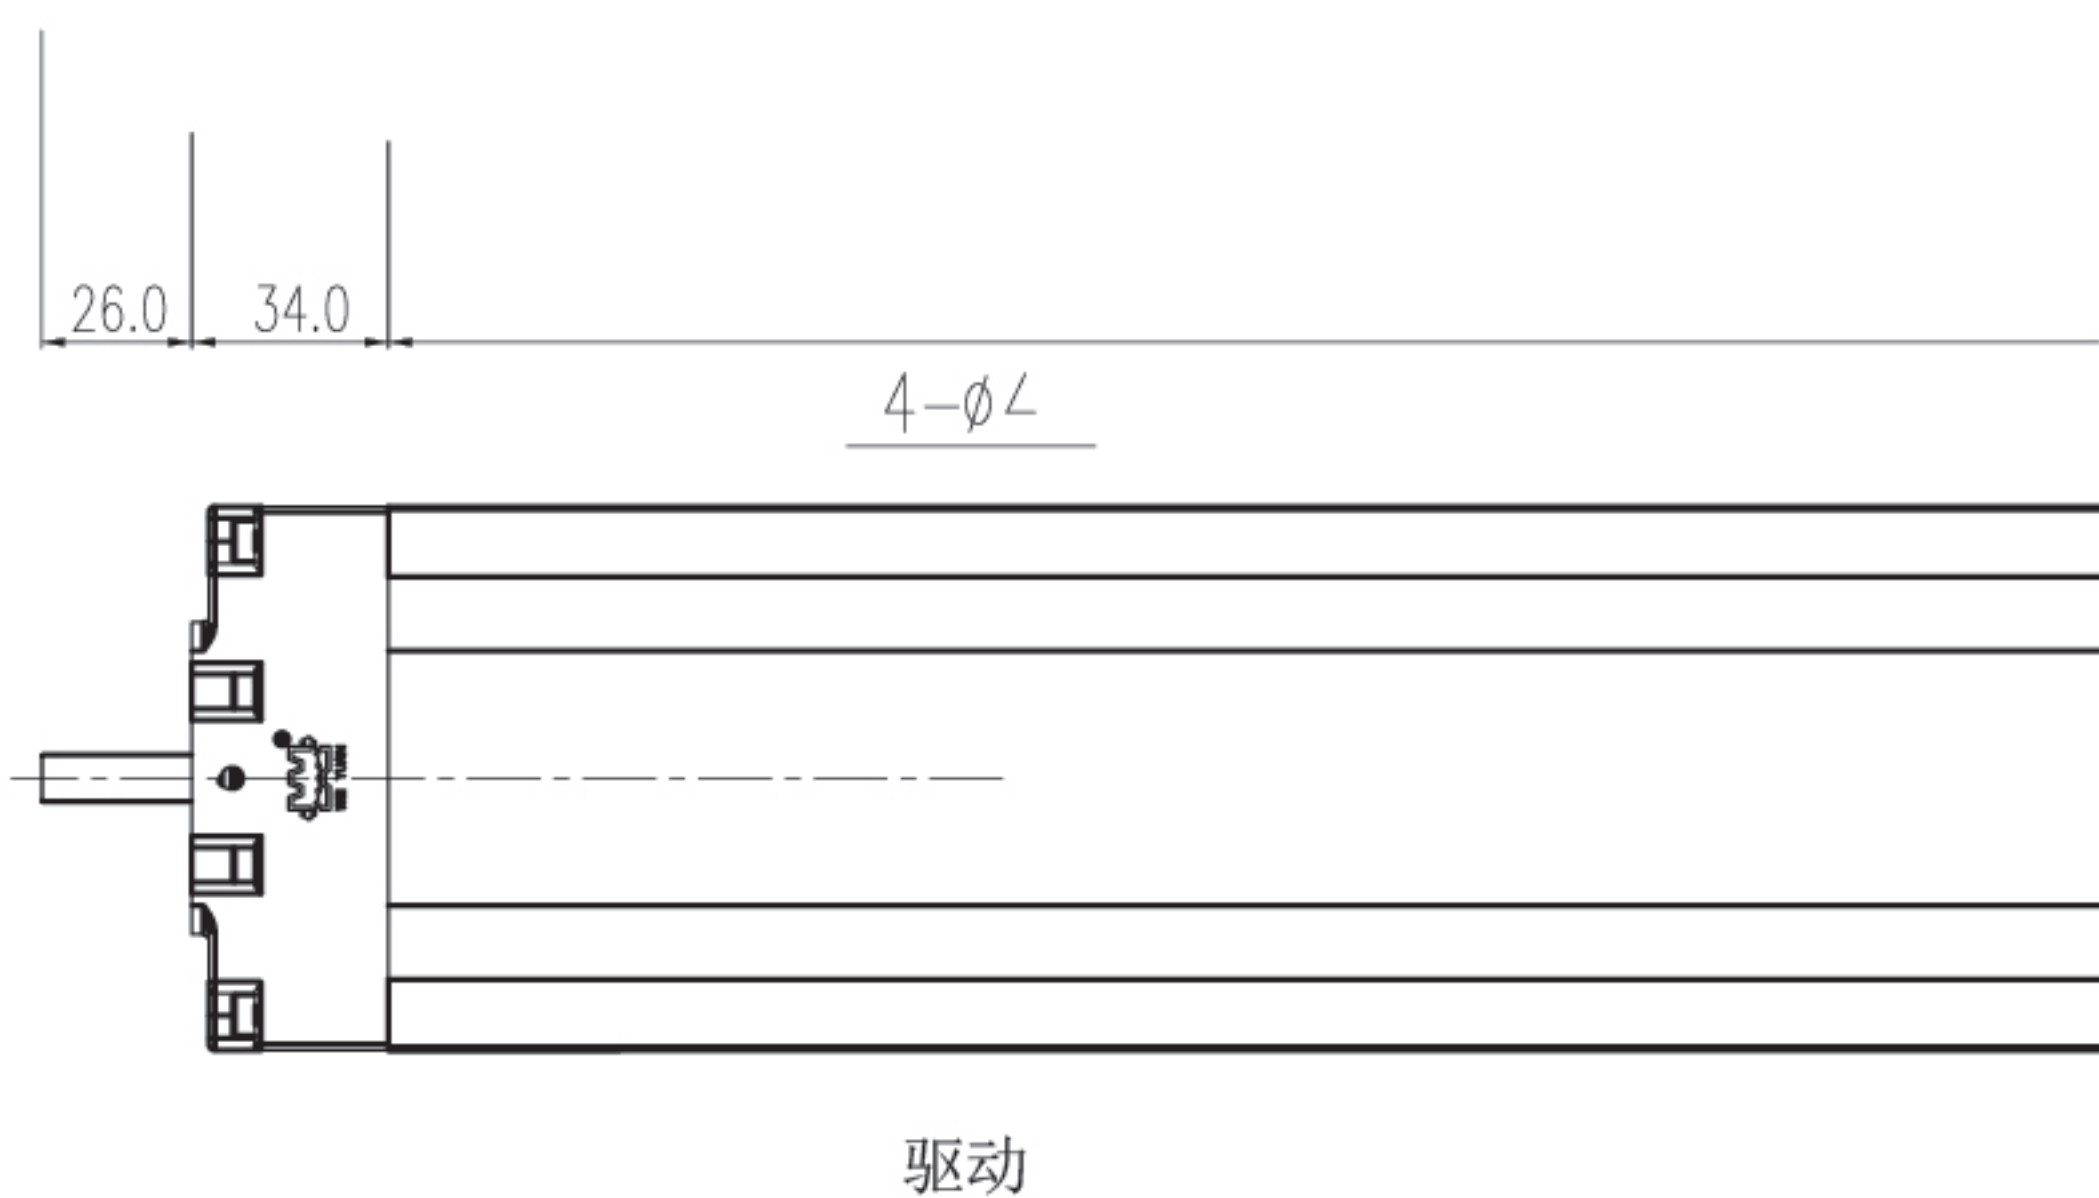

Stroke	单位 Units	100	200	300	400	500	600	700	800			注意: (CAUTION)
Model	kg	1.442	1.937	2.432	2.927	3.917	4.412	4.907	5.4			1. 模组重量不包括, 电机座、电机、联轴器、感应开关及开关座等附件
Model	kg	1.356	2.805	3.3	3.795	4.29	4.785	5.28	5.8			1. Motor, coupling, bellows cover, motor mount, switches or cable duct are not included in weight calculation.
Stroke	单位 Units	100	200	300	400	500	600	700	800			2. 超过规定行程, 速度需要下降, 具体和我司技术中心联系!
Model	mm/s			250			220	200	160			
Model	mm/s			500			420	400	300			


直线模组产品系列

型号 Model	MSY94	MSY150	MSY200
固定面板 Fixed board			
—用于带一个滑台的面板尺寸	—用于带两个滑台的面板尺寸	—用于安装系统的固定块尺寸	

Technical drawing of the MSY94 motor connection plate. The drawing shows a rectangular plate with two mounting holes. The distance between the centers of the holes is 20.0. The distance from the left edge to the center of the first hole is 4.0. The diameter of the holes is 4.0. The thickness of the plate is 10.0. The mounting holes are labeled 2-M3 and 2-Ø4. The overall width of the plate is 20.0.

Technical drawing of the fixed block for the MSY94 motor connection plate. The drawing shows a rectangular block with a mounting hole. The mounting hole is labeled 2-M3. The overall width of the block is 20.0.

MSY94电机连接座

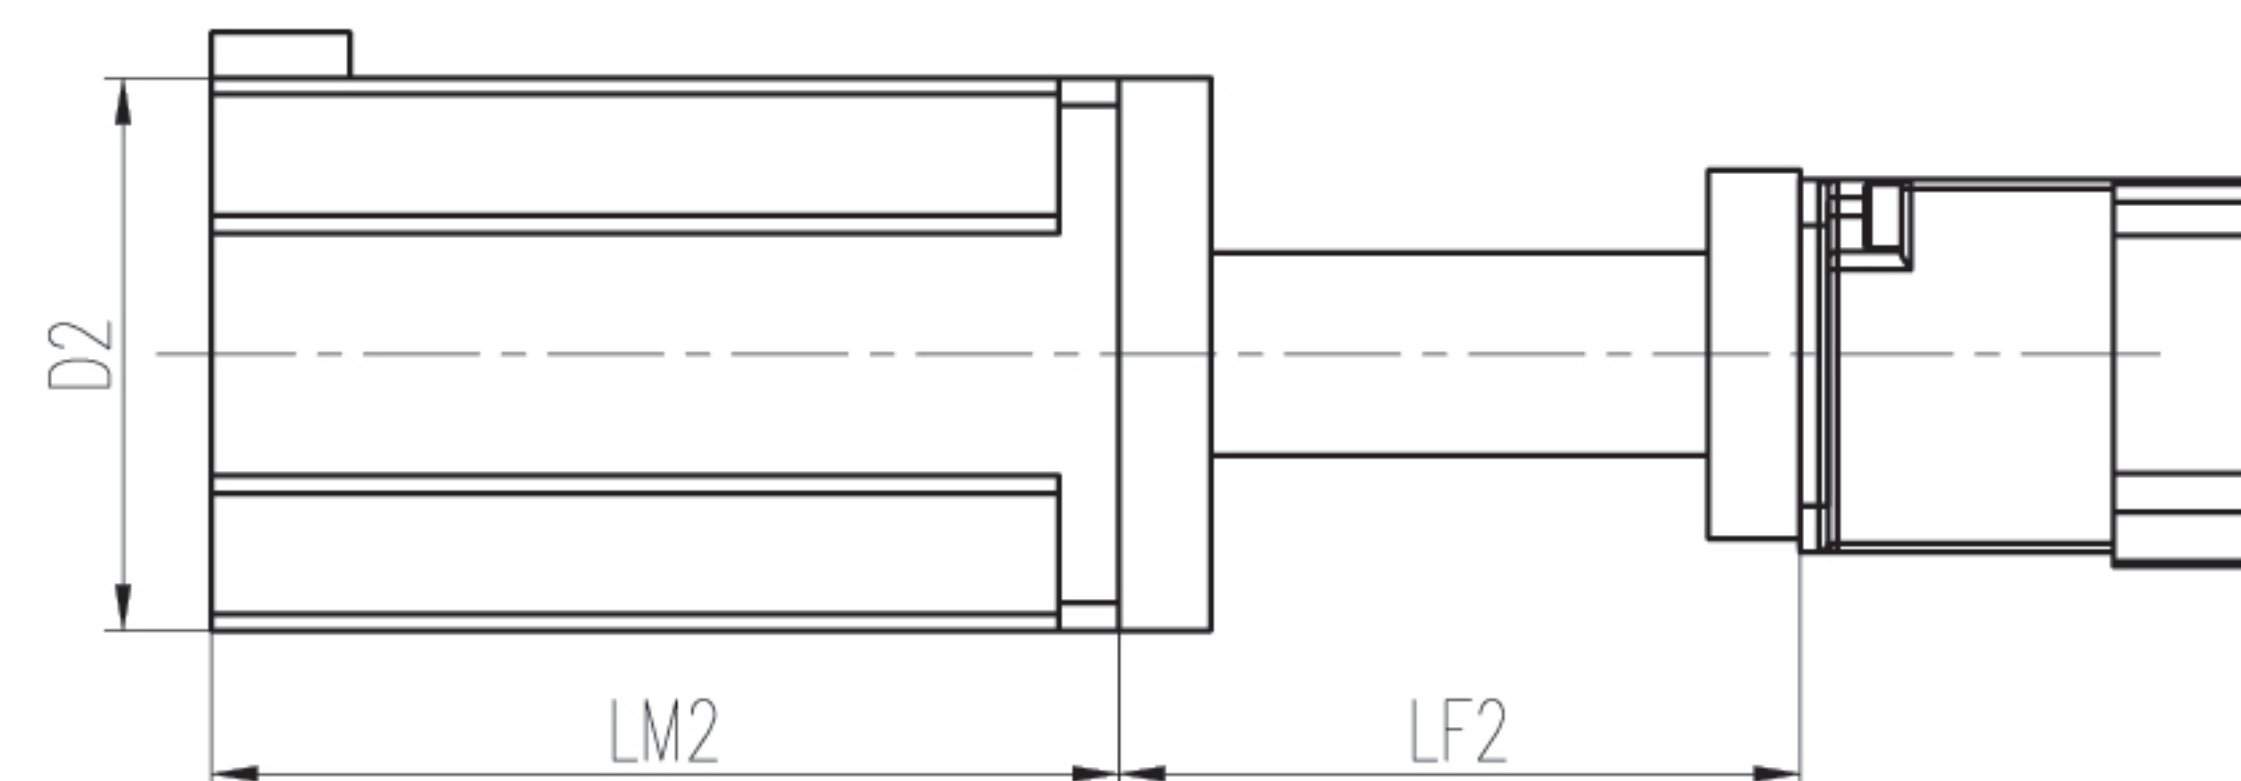

款式 Model	伺服电机 AC Servo	步进电机 Stepping motor	尺寸 (mm) Size															
	品牌 Brand	功率 Power	品牌 Brand	法兰 Flange	D1	D2	LM1	无制动	带制动	LM2	LF1	LF2	LR1	LR2	F1	F2	G1	G2
MR ML MU MD	松下	200W	雷赛	57	57	60	81	79	116				153	156	63	66	42	42
		400W				60		99	135					156		66		42
	台达	200W	杰美康	57	57	60	81	106	142				153	156	63	66	42	42
		400W				60		131	167					156		66		42
	安川	200W				60		97						156		66		42
		400W				60		125						156		66		42
	富士	200W				60		97	135					156		66		42
		400W				60		125.5	163					156		66		42
	英威腾	200W				60		110	145					156		66		42
		400W				60		135	165					156		66		42
MF					57	60	81	参照上格			57	74						23