


型号
Model MSX45 MSX65 MSX84

规格 Specification	单位 Unit	MSX65	安装方式 Installation Way	导轨长度 Lead	负载 Load	A(mm)	B(mm)	C(mm)
MSX65-MF		MSX65-M(L/R/U/D)	水平安装 Horizontal Use	5	60	500	30	15
				10	30	500	60	32
				15	20	500	130	65
				16	15	500	170	160
				15	3	500	600	320
				5	60	30	30	500
				10	25	60	60	500
				10	20	130	130	500
				16	10	170	170	500
输出功率 Rated Output	W	200/400W, 3000min ⁻¹	垂直安装 Wall Installation Use	5	30	15		30
最大速度 Max.Speed	mm/s	250(500/800)		10	25	32		60
最大负载 Max.Load	kg	H ₁ : 25 (8/3) V ₁ : 11 (4/2)	垂直安装 Vertical Use	10	20	65		130
		H ₂ : 60(30/15) V ₂ : 30(15/8)		16	10	160		170
有效行程 Stroke Range	mm	100-900		15	3	320		500
定位精度 Repeatability	mm	±0.02	额定负载 Estimated Condition	单位	Mt _{max}	Mx _{max}	My _{max}	Mz _{max}
驱动方式 Drive Type		丝杠 BALL SCREW		Nm	6	310	220	220

MSX65

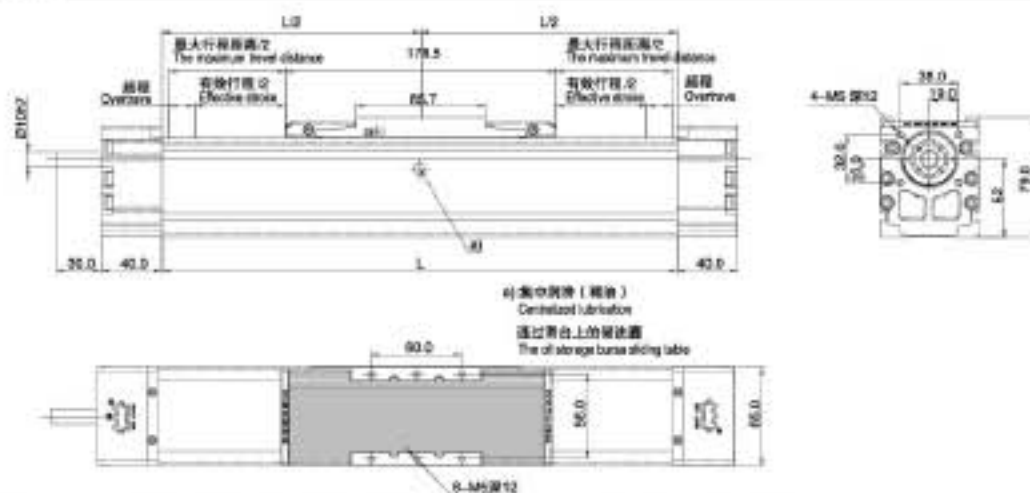

Stroke	单位	100	200	300	400	500	600	700	800	900	1200
Model	Units										
MSX65-1P	Kg	2.691	3.043	3.377	3.72	4.063	4.406	4.749	5.092	5.435	6.464
Speed	单位	100	200	300	400	500	600	700	800	900	1200
Model	Units										
MSX65-MF-L	mm/s					250				180	
MSX65-MF-N	mm/s					500				360	
MSX65-MF-H	mm/s					800				580	

注意: (CAUTION)

1、模组重量不包括电机座、电机、联轴器、感应开关及开关座等附件。

2、超过规定行程，速度需要下降，具体和贵司技术中心联系！

3、Motor, coupling, bellows cover, motor mount, switches or cable duct are not included in weight calculation.

4、Decorate if stroke is exceeded, please contact us for more details.

型号
Model MSX45 MSX65 MSX84


固定面板 Fixed board

—用于安装感应开关的截面尺寸


The cross section size used for sensor installation

—用于安装系统的固定块尺寸

The fixed block size used for installation

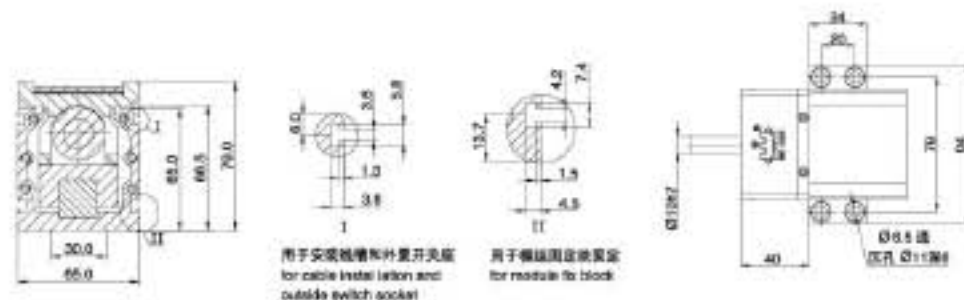

MSX65 电机连接器 Motor socket

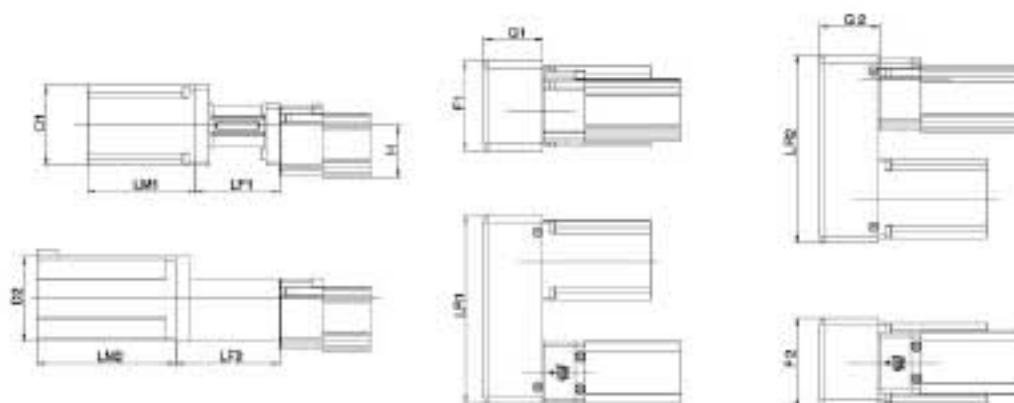

款式 Model	伺服电机 AC Servo		步进电机 Stepping Motor		尺寸 (mm) Size														
	品牌 Brand	功率 Power	品牌 Brand	法兰 Flange	D1	D2	LM1	LM2		LF1	LF2	LR1	LR2	F1	F2	G1	G2	H	
MR ML MU MD	松下	100W	雷赛	57	57	60	81	79	118			153	153	63	63	42	42	51.5	
		200W				60		99	135				153		63		42	51.5	
	台达	100W	杰美康	57	57	60	81	106	142			153	153	63	63	42	42	51.5	
		200W				60		131	167				153		63		42	51.5	
	安川	100W				60		97					153		63		42	51.5	
		200W				60		125					153		63		42	51.5	
	富士	100W				60		97	135				153		63		42	51.5	
		200W				60		125.5	163				153		63		42	51.5	
	英威腾	100W				60		110	145				153		63		42	51.5	
		200W				60		135	165				153		63		42	51.5	
MF				57	60	81	参照上格		62	74							51.5		